


Overview

Lumisys Dimming Channel Control Station

This station provides master raise or lower of a dimming channel.

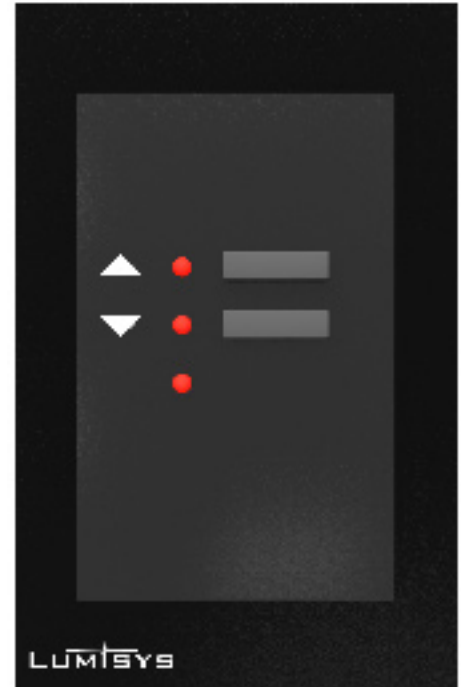

Green Impact



Existing Buildings

System	Category	Prereq.	LEED Credit
EB	SS	-	7
EB	EA	1	1,6
EB	IEQ	-	6,8
EB	IUOM	-	1

New Construction

System	Category	Prereq.	LEED Credit
NC	SS	-	8
NC	EA	1	1
NC	MR	-	5
NC	EQ	-	6,8
NC	ID	-	1

Ordering Information

Catalog # Description

LD200RS1C Lumisys Dimming Channel Control Station - Master Raise / Master Lower

Optional Accessories

Catalog

Description

LD200IR

Lumisys Portable Infrared Remote

LD200MS

Lumisys Dimming Master Station

LD200PB

Lumisys Dimming Power Boosters

LD200RSXX

Lumisys Dimming Remote Stations (5 choices available)

Specifications:

Electrical

Wiring Class 2 control wiring.

Mechanical

High impact polycarbonate faceplate with permanent legends and no visible mounting screws.

Environmental

Operating Temperature 0° to 125°F
 Operating Humidity 20% - 95% RH, Non-condensing

Typical Wiring

